

NUVEX

2-8°C, 15-25°C, -25 TO -15°C



TEMPERATURE
CONTROLLED
PACKAGING



Nuvex Thermal Type A solutions, engineered by industry leaders Von Gahlen, Intelsius, and Berlin Packaging, are a range of high-performance single and multi-use temperature-controlled packaging systems designed for shipping UN2915 Type A compliant* radiopharmaceutical diagnostics and treatments.

Comprising a flexible 1 to 4 lead shielding containers configuration, these modular solutions are compatible with a wide range of lead shielding containers from VG-LP-10 to VG-LP-22.

Nuvex utilises VIP and PCM technology, and is tested against challenging ISTA 7D Summer and Winter profiles, ensuring high-performance in the most challenging shipping lanes.

Features

- Up to 96+ hours of high performance thermal protection
- Flexible modular system with 1 to 4 lead shield container configuration spanning VG-LP-10 to VG-LP-22
- VIP and PCM system tested against ISTA 7D Summer and Winter profiles
- Stabilisation and shock absorption within secondary packaging for a wide range of Type A payloads
- Leakproof, 95kPa compliant
- US DOT 7A Certified*

*Pending approval

For more information please contact Intelsius UK cs@intelsius.com





NUVEX SINGLE-USE SOLUTIONS


Code	Product Name	External Dimensions	Payload Dimensions (Ø x H)	Shielding Containers	Mass	Volumetric Weight L/6	Duration*
NUVS221	NUVEX SINGLE-USE 2-8°C	385 x 380 x 365 mm 15.1 x 14.9 x 14.3 in	50.5 x 93.3 mm (VG-LP-10) to 75 x 120 mm (VG-LP-22)	1 to 4	11.6 to 13.3 kg 25.5 to 29.3 lbs	8.9 kgvol ^c 19.6 lbsvol ^c	96+
NUVS222	NUVEX SINGLE-USE 15 to 25°C	385 x 380 x 365 mm 15.1 x 14.9 x 14.3 in	50.5 x 93.3 mm (VG-LP-10) to 75 x 120 mm (VG-LP-22)	1 to 4	10.5 to 11.2 kg 23.1 to 24.6 lbs	8.9 kgvol ^c 19.6 lbsvol ^c	96+
NUVS223	NUVEX SINGLE-USE -25 to -15°C	385 x 380 x 365 mm 15.1 x 14.9 x 14.3 in	50.5 x 93.3 mm (VG-LP-10) to 75 x 120 mm (VG-LP-22)	1 to 4	14.1 to 14.8 kg 31 to 32.6 lbs	8.9 kgvol ^c 19.6 lbsvol ^c	96+

NUVEX MULTI-USE SOLUTIONS

Code	Product Name	External Dimensions	Payload Dimensions (Ø x H)	Shielding Containers	Mass	Volumetric Weight L/6	Duration*
NUVM221	NUVEX MULTI-USE 2-8°C	386 x 372 x 370 mm 15.1 x 14.9 x 14.3 in	50.5 x 93.3 mm (VG-LP-10) to 75 x 120 mm (VG-LP-22)	1 to 4	13.8 to 14.5 kg 30.4 to 31.9 lbs	8.9 kgvol ^c 19.6 lbsvol ^c	96+
NUVM222	NUVEX MULTI-USE 15 to 25°C	386 x 372 x 370 mm 15.1 x 14.9 x 14.3 in	50.5 x 93.3 mm (VG-LP-10) to 75 x 120 mm (VG-LP-22)	1 to 4	15 to 15.7 kg 33 to 34.6 lbs	8.9 kgvol ^c 19.6 lbsvol ^c	96+
NUVM223	NUVEX MULTI-USE -25 to -15°C	386 x 372 x 370 mm 15.1 x 14.9 x 14.3 in	50.5 x 93.3 mm (VG-LP-10) to 75 x 120 mm (VG-LP-22)	1 to 4	15.9 to 16.6 kg 35 to 36.5 lbs	8.9 kgvol ^c 19.6 lbsvol ^c	96+

NUVEX LEAD SHIELDING CONTAINERS

Code	Weight (kg)	Internal Dimensions Lead Jar (Ø x H)	External Dimensions Lead Jar (Ø x H)	Wall Thickness
VG-LP-10	1.5	31 x 70.5 mm 1.2 x 2.7 in	50.5 x 93.3 mm 1.9 x 3.6 in	10mm
VG-LP-12	2.02	33.4 x 69 mm 1.3 x 2.7 in	57 x 93.7 mm 2.2 x 3.6 in	12mm
VG-LP-17	3.44	33.4 x 69 mm 1.3 x 2.7 in	67 x 103.7 mm 2.6 x 4 in	17mm
VG-LP-20	4.45	32 x 70 mm 1.2 x 2.7 in	72 x 110.8 mm 2.8 x 4.3 in	20mm
VG-LP-22	5.32	31 x 75.5 mm 1.2 x 2.9 in	75 x 120 mm 2.9 x 4.7 in	22mm

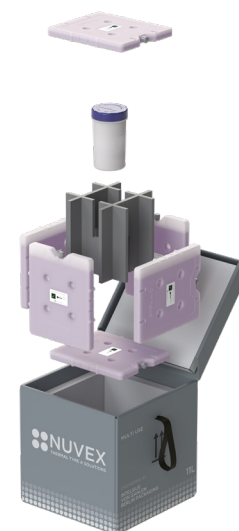

UNITED KINGDOM: DGP Intelsius Ltd
1 Harrier Court, Airfield Business Park,
Elvington, York, YO41 4EA,
United Kingdom

t: +44 (0) 1904 607 390
f: +44 (0) 1904 607 391
cs@intelsius.com

AMERICA: DGP Intelsius LLC
1399 Perry Rd, Suite 190,
Plainfield, IN 46168,
United States of America

t: +1 317 452 4006
f: +1 317 290 4621
americasorders@intelsius.com

MALAYSIA: DGP Intelsius Sdn Bhd
Plot 11, Lorong Bemban 2, Estet
Perindustrian Bemban, 31000
Batu Gajah, Malaysia

t: +605 3666 399
f: +605 3669 399
compliance@intelsius.com

GERMANY: DGP Intelsius GmbH
Eulerweg 11
64291 Darmstadt
Germany

t: +49 6151 4936650
f: +49 (0) 6151 4936651
info@intelsius.de

IRELAND: DGP Intelsius Ireland Ltd.
Unit 8, Coolcaslagh Industrial Estate,
Coolcaslagh, Killarney
Co. Kerry, V93 K006, Ireland

t: +353 (0)64 668 61 71
salesireland@intelsius.com

INDIA: DGP Intelsius Cold Chain Pvt. Ltd.
Sun Srishti, C 10, Saki Vihar Road,
Chandivali Powai. Mumbai - 400072
Maharashtra - India

+91 22 49746536
compliance@intelsius.com